

FILTAIR 2

Industrial Strength Dust Extractor

STOPS HARMFUL DUST BEING
INHALED & ELIMINATES
DANGEROUS PARTICLES FROM
THE WORKING AREA

**Improves workshop
conditions during**
Grinding
Polishing
Lapping
Sharpening
Planing
Routing
Powder handling



The **FILTAIR 2** is a continuously rated extraction machine designed to be connected to many dust producing sources.

The **FILTAIR 2** extracts the contaminated air from the work area and passes it through re-usable fabric filters to remove the dust. Cleaned air is ducted to the rear of the machine for return to the workshop area and the residue falls into the catchment tray in the base.

Made in Britain



***QUICK TO INSTALL AND EASY TO USE,
connect up the pipes, plug in and GO.***




Registered office: Unit Z, Hamstead Industrial Est,
Austin Way, Great Barr, Birmingham, B42 1DU
Reg. No: 1414313 VAT No: 294 5870 13
Tel: 44 (0) 121 358 1456 Fax: 44 (0) 121 357 4159
Email: info@balco.co.uk Website: www.balco.co.uk
Manufacturing processing equipment since 1969



FILTAIR 2 Dust extractor


- a = Shaker knob
- b = Filter cover
- c = Suction inlets 75 mm Ø
- d = Air outlet
- e = Power cable

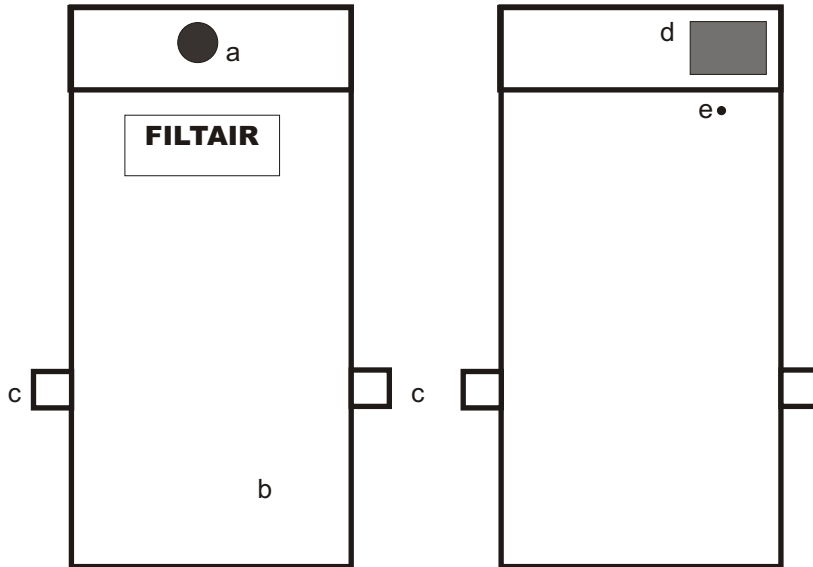

Height floor to work top = 885 mm
 Maximum width = 540 mm
 Maximum front to rear
 = 520 mm (570 mm with sound diffuser)
 Weight = 42 Kgs nett
 Sound level: 70dB at one metre
 Extractor motor: 200cfm (.095 m²/second)
 0.5 hp (.37kw) 3.1A. IP64. Cap. 16µF
 Voltage 220 - 240 volts 50 / 60 Hz
 Stock number: 2485D

EXTERIOR VENT KIT

Reduces operational volume from 70dB to 65dB and vents waste air out of work area. Contains 3 metres x 75 mm pipe, clips and wall/window plate. Easy self fit.
 Stock No: 2485EVK

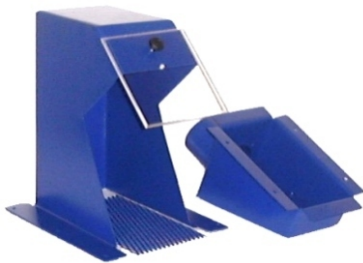

COWL SET

1 x Hood assembly with safety screen. 1 x Base unit. 1 x Mesh
 2 x Adjustable slide runners
 Height = 290 mm. Width = 135 mm
 Front to rear = 240 mm. Weight = 2.5 Kgs nett
 Maximum wheel size 150 mm Ø x 50 mm wide.
 Finish: powder coated steel. Stock number: 2484D



POLISHING MOTOR BASE

Motor base unit to bring motor height to mm
 With 240 volt mains switch and Motor switch. Stock No: 8835F

POLISHING MOTORS, 240 volt single phase

0.5 hp 0.37kW, 2800 rpm with taper spindles, Double ended,
 Stock No: 8834E. Single ended No 8834S

1.5 hp 1.1 kW, 2800 rpm with taper spindles, Double ended,
 Stock No: 8835A. Single ended, Stock No: 8835S

FITTING ACCESSORIES

75mm Ø flexipipe, per metre. Stock number: 0129C

75mm clips, each, Stock No: 0130C



DUST REMOVAL SYSTEM

The FILTAIR can be connected to one of our Polypropylene or Steel enclosures to create a safe working environment for the weighing, decanting and packaging of dangerous or unpleasant materials that produce dust.

Note this is a PARTICLE filter system and not intended for use with acids or solvents.

Particles are collected in the removable base tray and the air flow is filtered via 10 micron filters to remove the last traces of dust. If the particle size is smaller than 10 microns diameter (0.001 cm) an external filter can be connected to the FILTAIR outlet to reduce the emission size to 1 micron (0.0001mm).

Please quote enclosure size and dust type for a specific quotation.



Registered office: Unit Z, Hamstead Industrial Est,
 Austin Way, Great Barr, Birmingham, B42 1DU
 Reg. No: 1414313 VAT No: 294 5870 13
 Tel: 44 (0) 121 358 1456 Fax: 44 (0) 121 357 4159
 Email: info@balco.co.uk Website: www.balco.co.uk
Manufacturing processing equipment since 1969

